

- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard

TABLES

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class (60Hz)
CT104-601MR	600:5MR	C200	0.6B1.8
CT104-122MR	1200:5MR	C400	0.3B1.8
CT104-202MR	2000:5MR	C400	0.15B1.8
CT104-302MR	3000:5MR	C400	0.15B1.8
CT104-402MR	4000:5MR	C400	0.15B1.8

Turns				
MR	X1-X2	X2-X3	X3-X4	X4-X5
600:5	20	10	50	40
1200:5	40	20	100	80
2000:5	80	160	60	100
3000:5	200	240	60	100
4000:5	100	300	200	200

INSULATION LEVEL

600 V, BIL 10kV full wave

FREQUENCY

50-400 Hz

THERMAL RATING

600:5MR – 3000:5MR 2.0 @ 30 deg. C ambient
1.5 @ 55 deg. C ambient
4000:5MR 1.5 @ 30 deg. C ambient
1.33 @ 55 deg. C ambient

OUTER ENCAPSULATION

Plastic Cased

SECONDARY TERMINALS

Brass screw # 10-32 with one flat washer, accessible from either side


APPROX. WEIGHT

59 lbs.

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- IEC Ratios/Accuracies
- Non-standard thermal rating
- Different encapsulation
- Different secondary termination
- Special mounting needs

DIMENSIONS - ALL DIMENSIONS ARE IN INCHES (MM)

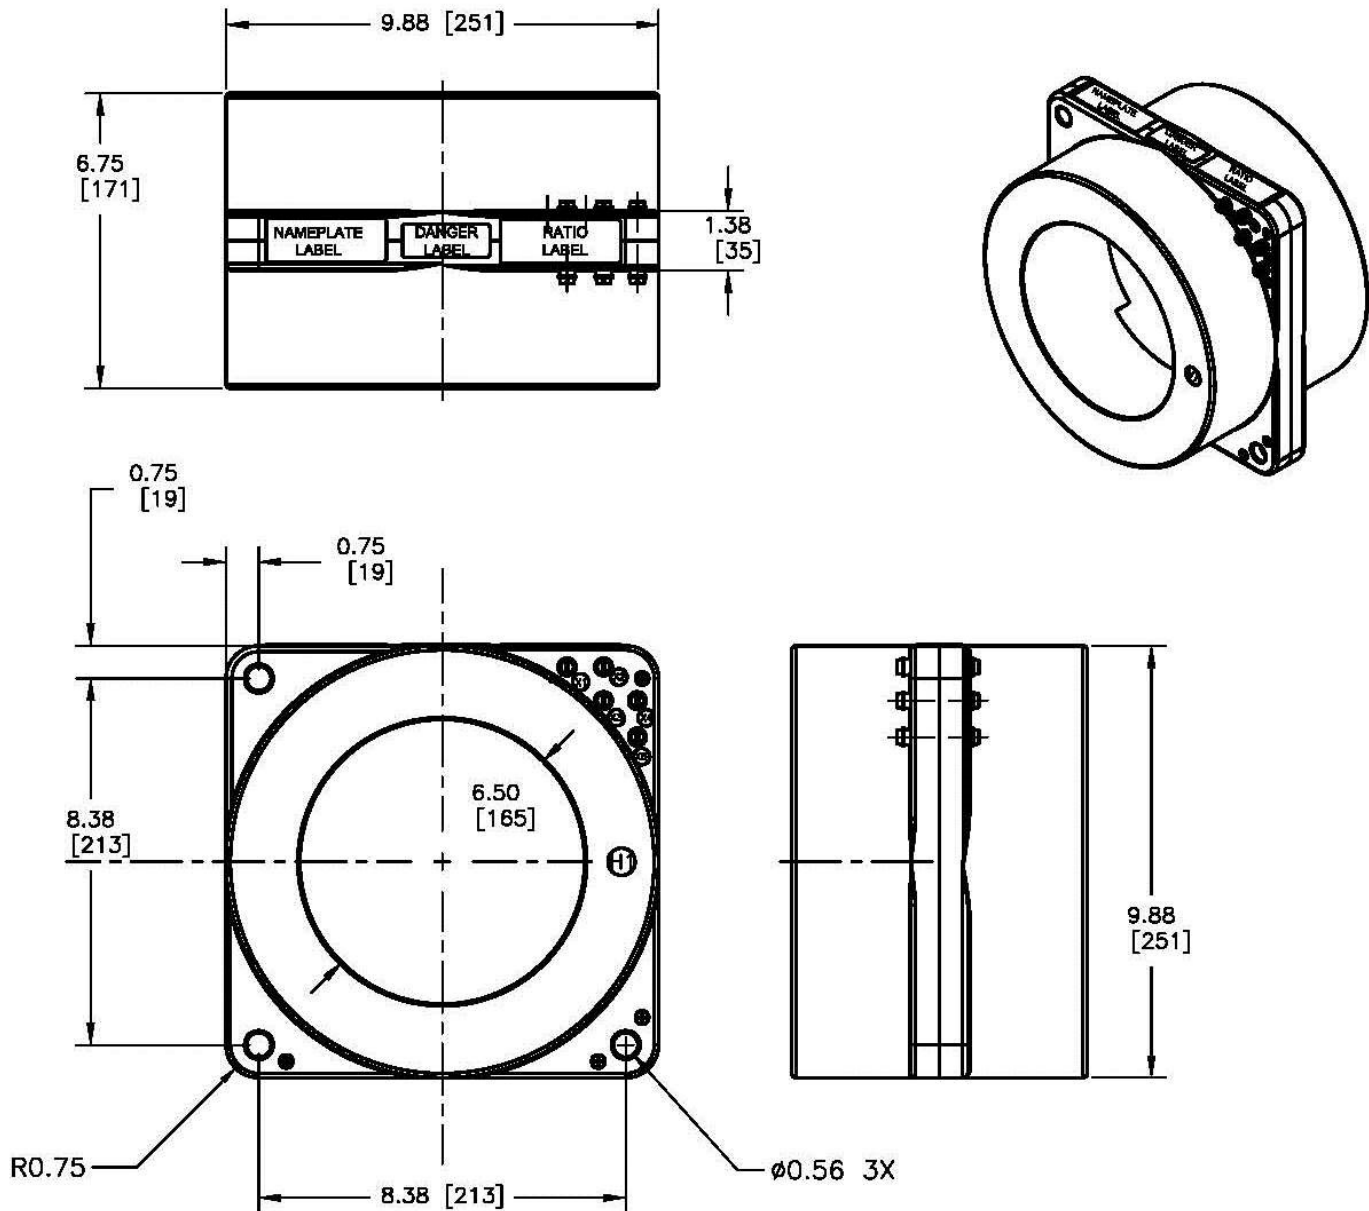

EXCITATION CURVES:

Available upon request: