



INSULATION LEVEL

600 V, BIL 10kV full wave

FREQUENCY

50-400 Hz

THERMAL RATING

As per table

OUTER ENCAPSULATION


Plastic Cased

SECONDARY TERMINALS

Brass screw # 10-32 with one flat washer and lock washer

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- IEC Ratios/Accuracies
- Non-standard thermal rating
- Different secondary termination
- Special mounting needs

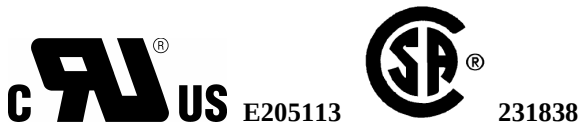


- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard


TABLES

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS @ 60 HZ					ANSI RELAY (@ 60 HZ)	THERMAL RATING FACTOR (@ 30°C)
		B0.1	B0.2	B0.5	B0.9	B1.8		
CT105-601MR	600:5	0.3	0.3	0.3	0.3	0.6	C100	1.5
CT105-601MR-01	600:5	0.3	0.3	0.3	0.3	0.6	C200	1.5
CT105-122MR	1200:5	0.3	0.3	0.3	0.3	0.3	C200	1.33
CT105-122MR-01	1200:5	0.3	0.3	0.3	0.3	0.3	C400	1.5
CT105-202MR	2000:5	0.3	0.3	0.3	0.3	0.3	C400	1.33
CT105-202MR-02	2000:5	0.3	0.3	0.3	0.3	0.3	C800	2.0
CT105-302MR	3000:5	0.3	0.3	0.3	0.3	0.3	C400	1.33
CT105-302MR-01	3000:5	0.3	0.3	0.3	0.3	0.3	C800	1.33
CT105-402MR	4000:5	0.3	0.3	0.3	0.3	0.3	C400	1.33
CT105-402MR-01	4000:5	0.3	0.3	0.3	0.3	0.3	C800	1.33


DIMENSIONS (ALL DIMENSIONS ARE IN INCHES [mm]):

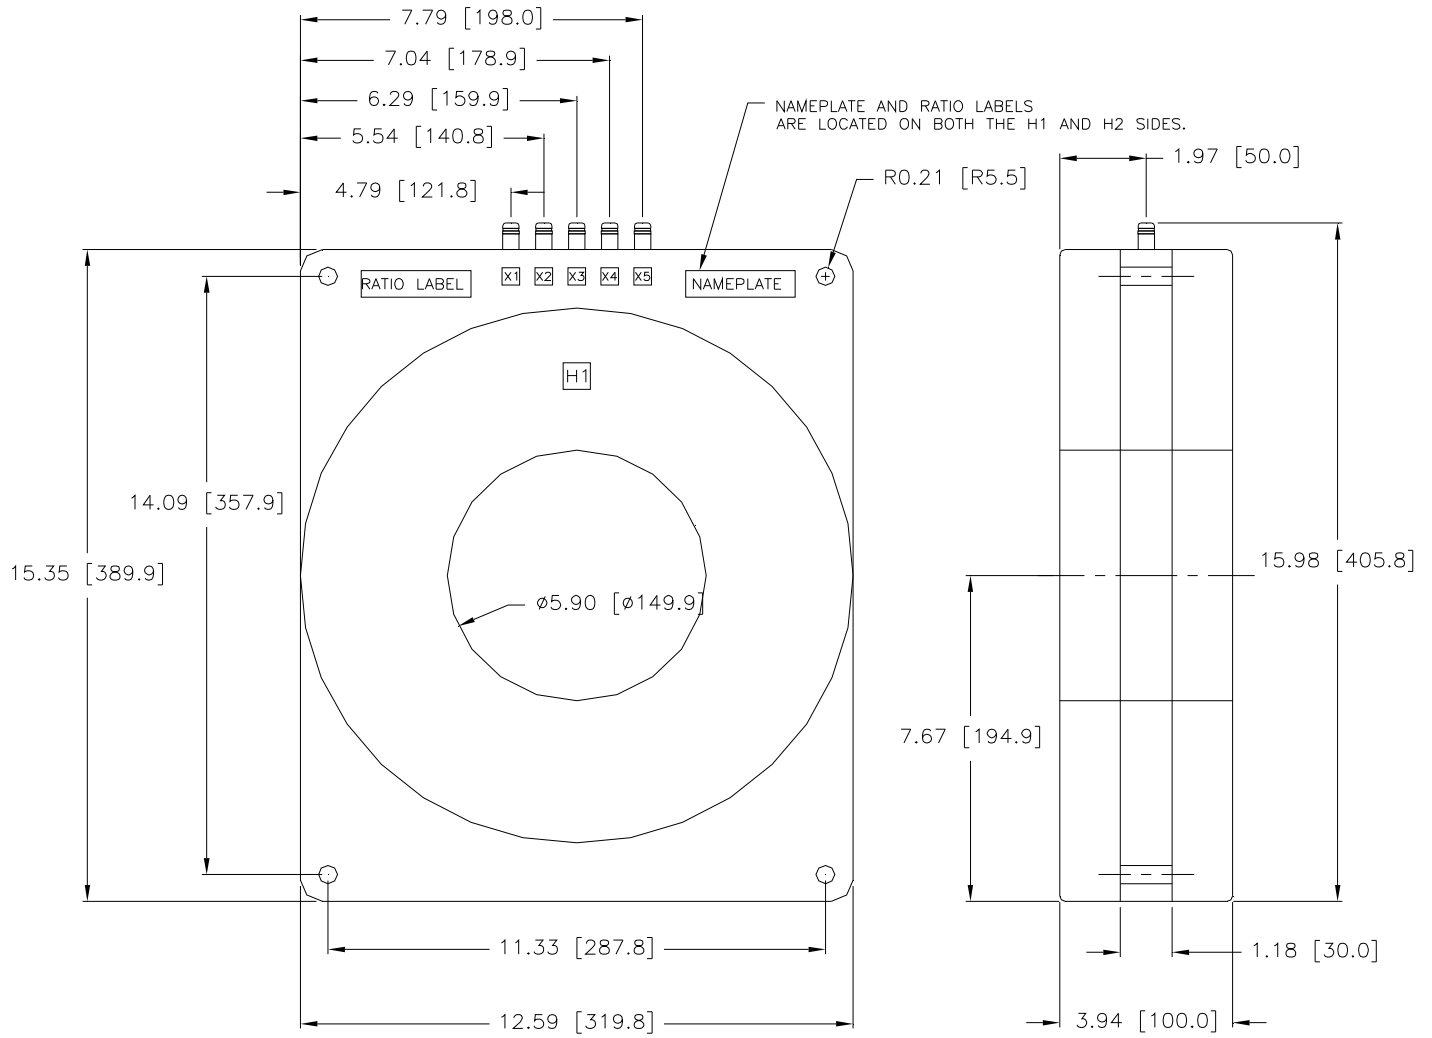


ANSI 600:5 TAPS




ANSI 1200:5 TAPS




ANSI 2000:5 TAPS



ANSI 3000:5 TAPS



ANSI 4000:5 TAPS



ANSI 5000:5 TAPS

