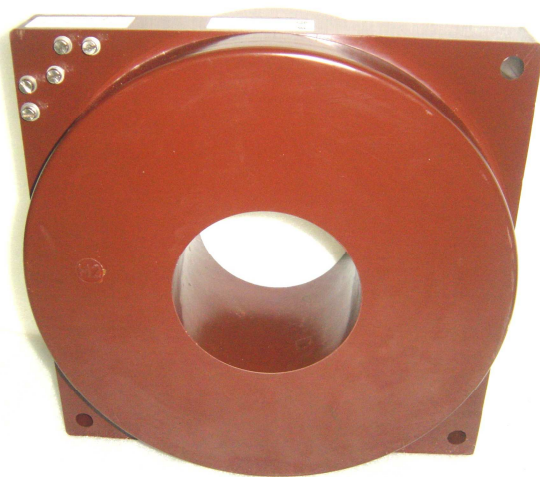


- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard

INSULATION LEVEL

600 V, BIL 10kV full wave

FREQUENCY

50-400 Hz

THERMAL RATING

50:5-4000:5 - 1.33 @ 30 deg. C ambient

OUTER ENCAPSULATION

Plastic Cased

SECONDARY TERMINALS

Brass screw # 10-32 with one flat washer and lock washer, accessible from either side

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- IEC Ratios/Accuracies
- Non-standard thermal rating
- Different secondary termination
- Special mounting needs

TABLES

CATALOG NUMBER	CURRENT RATIO	ANSI RELAY (@ 60 HZ)	THERMAL RATING FACTOR (@ 30°C)
CT107-122MR	1200:5	C800	1.0
CT107-202MR	2000:5	C800	1.0
CT107-302MR	3000:5	C800	1.0

DIMENSIONS (ALL DIMENSIONS ARE IN MILLIMETERS):

