

- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard

INSULATION LEVEL

600 V, BIL 10kV full wave

FREQUENCY

50-400 Hz

THERMAL RATING

As per tables

OUTER ENCAPSULATION

Plastic Cased

SECONDARY TERMINALS

Brass screw # 10-32 with one flat washer and lock washer, accessible from either side

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- IEC Ratios/Accuracies
- Non-standard thermal rating
- Different secondary termination
- Special mounting needs


TABLES

CATALOG NUMBER	CURRENT RATIO	ANSI RELAY CLASS (60HZ)	THERMAL RATING FACTOR (@ 30°C)
CT108-500	50:5	C10	2.0
CT108-750	75:5	C10	2.0
CT108-101	100:5	C20	2.0
CT108-151	150:5	C20	2.0
CT108-201	200:5	C50	2.0
CT108-251	250:5	C50	2.0
CT108-301	300:5	C100	2.0
CT108-401	400:5	C100	2.0
CT108-501	500:5	C150	2.0
CT108-601	600:5	C200	2.0
CT108-751	750:5	C200	2.0
CT108-801	800:5	C200	2.0
CT108-102	1000:5	C200	2.0
CT108-122	1200:5	C400	2.0
CT108-152	1500:5	C400	2.0
CT108-202	2000:5	C400	2.0
CT108-302	3000:5	C400	2.0
CT108-322	3200:5	C400	2.0
CT108-352	3500:5	C400	2.0
CT108-402	4000:5	C400	1.0

MULTI RATIO OPTION

Catalog #	Current Ratio	ANSI Relay Accuracy	THERMAL RATING FACTOR (@ 30°C)
CT108-601MR	600:5 MR	C200	2.0
CT108-122MR	1200:5 MR	C400	2.0
CT108-202MR	2000:5 MR	C400	2.0
CT108-302MR	3000:5 MR	C400	2.0
CT108-402MR	4000:5 MR	C400	1.0

Turns				
MR	X1-X2	X2-X3	X3-X4	X4-X5
600:5	20	10	50	40
1200:5	40	20	100	80
2000:5	80	160	60	100
3000:5	200	240	60	100
4000:5	100	300	200	200

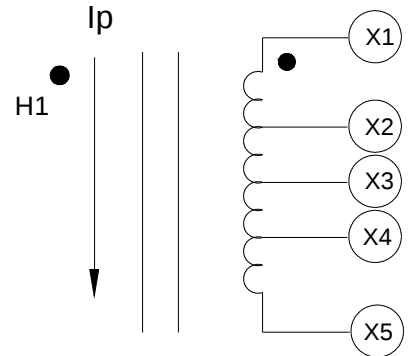

DIMENSIONS (ALL DIMENSIONS ARE IN INCHES [mm]):

