

- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard

TABLES

CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS @ 60 HZ					Thermal Rating	
			BO.1	B0.2	B0.5	B0.9	B1.8	30 C	55 C
CT111-500	50:5	-	4.8	-	-	-	-	2.0	1.5
CT111-750	75:5	C 10	2.4	4.8	-	-	-	2.0	1.5
CT111-101	100:5	C 10	2.4	2.4	4.8	-	-	2.0	1.5
CT111-151	150:5	C 20	1.2	1.2	2.4	4.8	-	2.0	1.5
CT111-201	200:5	C 20	0.6	1.2	1.2	2.4	4.8	2.0	1.5
CT111-251	250:5	C 20	0.6	0.6	1.2	2.4	2.4	2.0	1.5
CT111-301	300:5	C 20	0.3	0.6	1.2	1.2	2.4	2.0	1.5
CT111-401	400:5	C 50	0.3	0.3	0.6	0.6	1.2	2.0	1.5
CT111-501	500:5	C 50	0.3	0.3	0.3	0.6	1.2	2.0	1.5
CT111-601	600:5	C 100	0.3	0.3	0.3	0.3	0.6	2.0	1.5
CT111-751	750:5	C 100	0.3	0.3	0.3	0.3	0.6	2.0	1.5
CT111-801	800:5	C 100	0.3	0.3	0.3	0.3	0.3	2.0	1.5
CT111-102	1000:5	C 100	0.3	0.3	0.3	0.3	0.3	2.0	1.5
CT111-122	1200:5	C 200	0.3	0.3	0.3	0.3	0.3	2.0	1.5
CT111-152	1500:5	C 200	0.3	0.3	0.3	0.3	0.3	2.0	1.5
CT111-202	2000:5	C 200	0.3	0.3	0.3	0.3	0.3	2.0	1.5
CT111-252	2500:5	C 200	0.3	0.3	0.3	0.3	0.3	1.33	1.0
CT111-302	3000:5	C 200	0.3	0.3	0.3	0.3	0.3	1.33	1.0
CT111-402	4000:5	C 200	0.3	0.3	0.3	0.3	0.3	1.33	1.0
CT111-502	5000:5	C 200	0.3	0.3	0.3	0.3	0.3	1.0	0.8

INSULATION LEVEL

600 V; BIL 10kV full wave

FREQUENCY

50-400 Hz

OUTER ENCAPSULATION

Plastic Cased

SECONDARY TERMINALS

Brass screw # 10-32 with one flat washer, accessible from either side



APPROX. WEIGHT

31 lbs.

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- Non-standard thermal rating
- Different encapsulation
- Different secondary termination
- Special mounting needs

DIMENSIONS (ALL DIMENSIONS ARE IN INCHES (MM)):

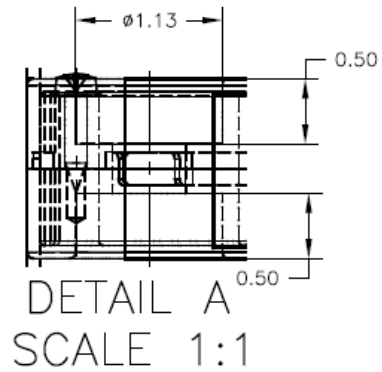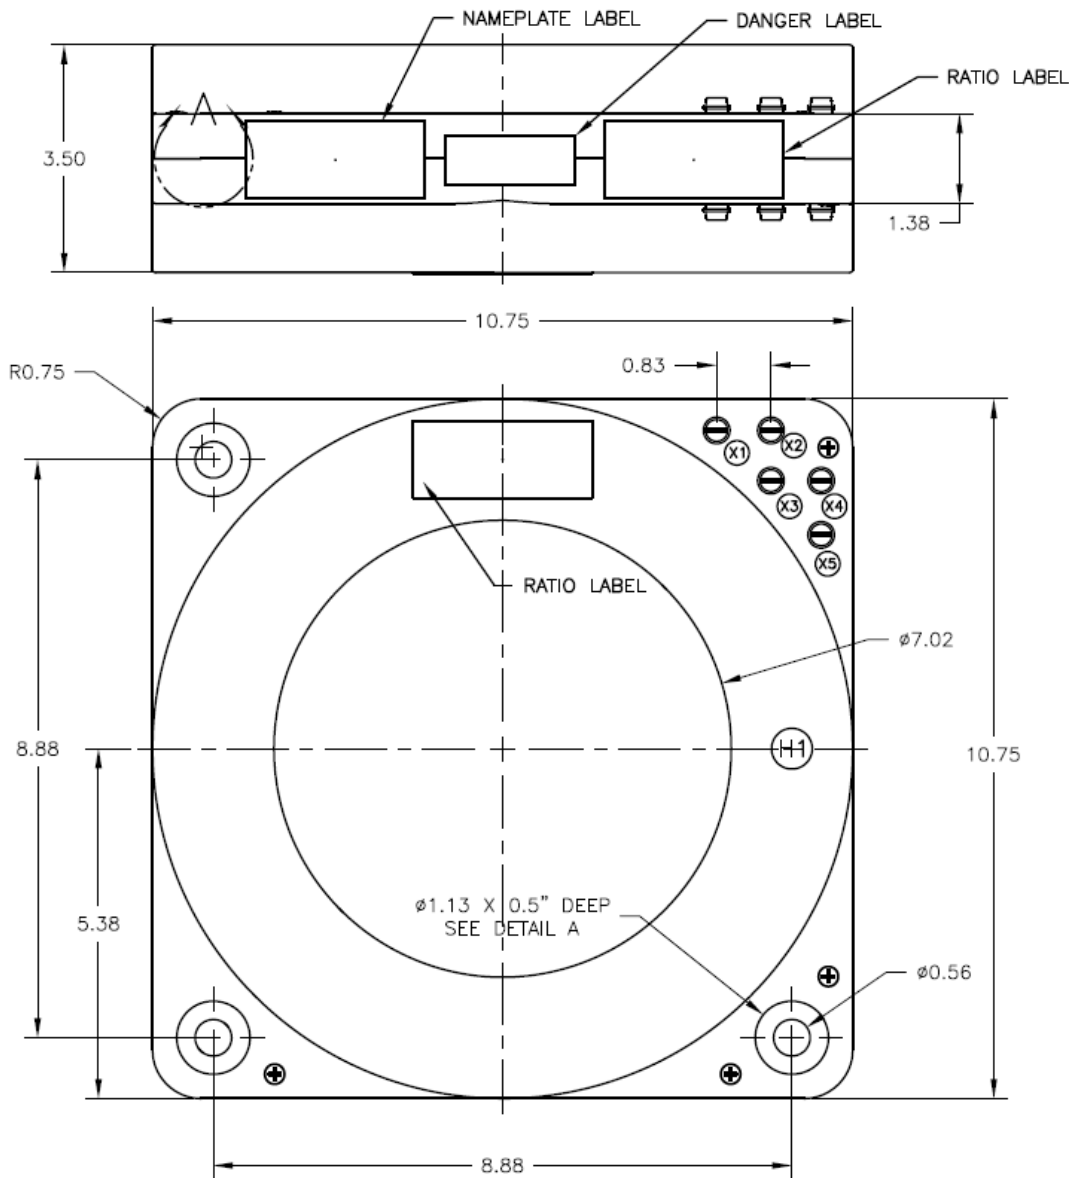

EXCITATION CURVES:

Available upon request: