

- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard

TABLES

Catalog #	Current Ratio	ANSI Relay Accuracy	ANSI Metering Accuracy (60Hz)	Thermal Rating		Turns Between Taps			
				30C	55C	X1-X2	X2-X3	X3-X4	X4-X5
CT111-601MR	600:5 MR	C100	0.6B1.8	2.0	1.5	20	10	50	40
CT111-122MR	1200:5 MR	C200	0.3B1.8	2.0	1.5	40	20	100	80
CT111-202MR	2000:5 MR	C200	0.15B1.8	2.0	1.5	80	160	60	100
CT111-302MR	3000:5 MR	C200	0.15B1.8	1.33	1.0	200	240	60	100
CT111-402MR	4000:5 MR	C200	0.15B1.8	1.33	1.0	100	300	200	200

INSULATION LEVEL

600 V; BIL 10kV full wave

FREQUENCY

50-400 Hz

OUTER ENCAPSULATION

Plastic Cased

SECONDARY TERMINALS

Brass screw # 10-32 with one flat washer, accessible from either side



APPROX. WEIGHT

31 lbs.

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- Non-standard thermal rating
- Different encapsulation
- Different secondary termination
- Special mounting needs

DIMENSIONS (ALL DIMENSIONS ARE IN INCHES (MM)):

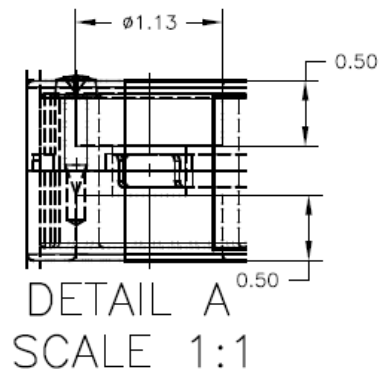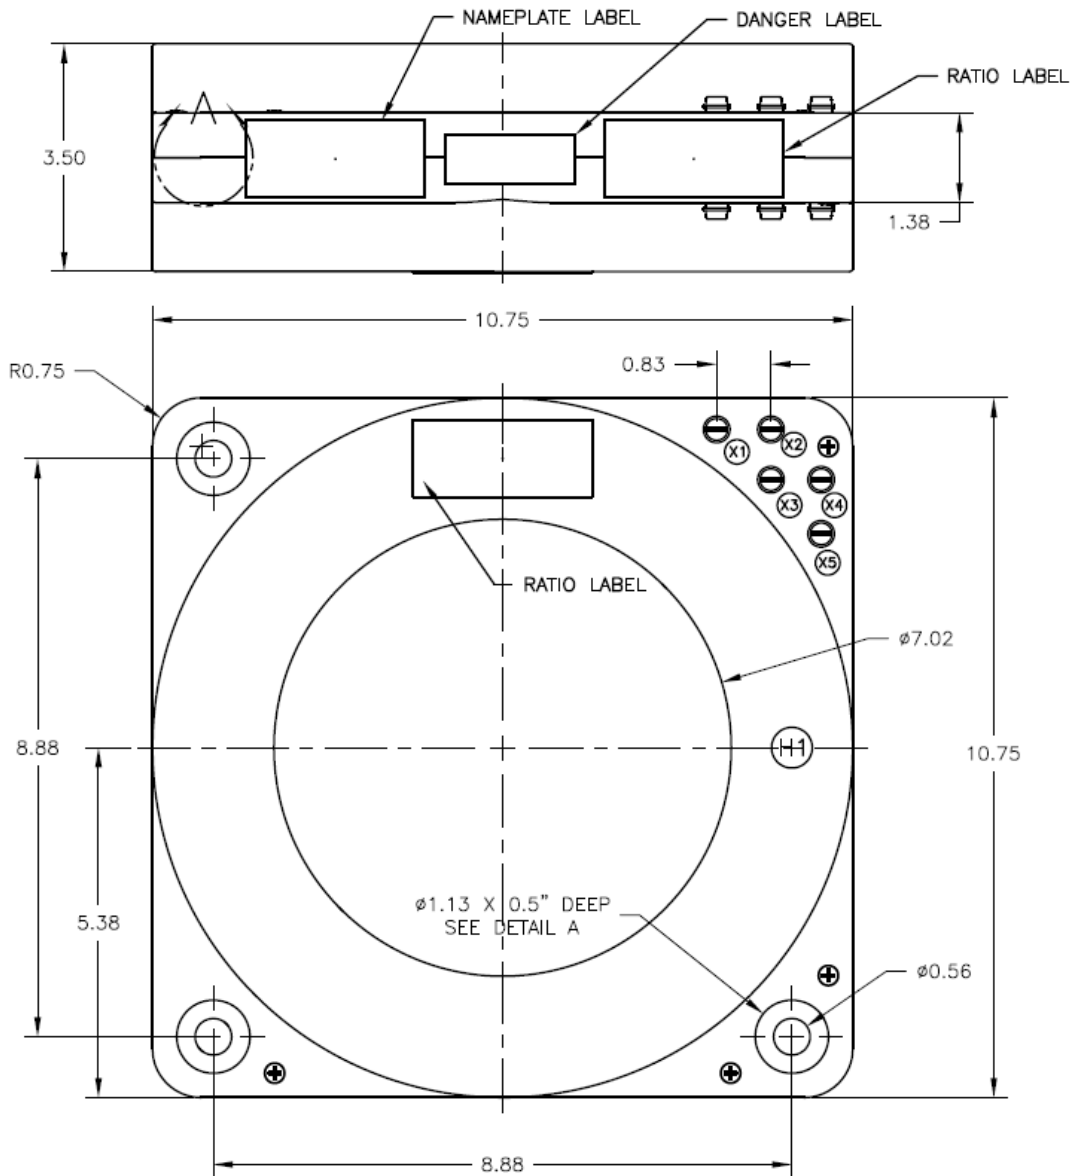

EXCITATION CURVES:

Available upon request: