

**Model CT601 – Miniature Current Transformers for
Metering/Indication Type Applications.**



STANDARD UNIT



INSULATION LEVEL

660 V/3kV

FREQUENCY

50-400 Hz.

ACCURACY

0.1% to 0.5%

OUTER ENCAPSULATION

Engineering plastic cased

SECONDARY TERMINALS

PCB mounting pins

OPTIONAL PRIMARY LEADS




**OPTIONAL 3 IN 1 DESIGN WITH
PRIMARY LEADS**



CUSTOM OPTIONS (CONTACT US)


- Custom Ratios possible
- mV output possible
- Primary 5 Amps to 250 Amps or more
- Primary turns of 4 to 30 based on ratio and accuracy
- Option of single CT unit with primary turns and termination of lug and/or terminal OR 3 CT unit possible
- DC immune design possible
- **RoHS compliant range**

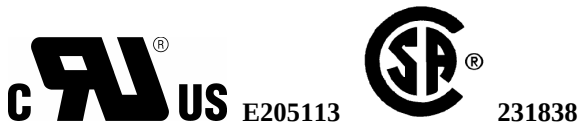

- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard



**Model CT601 – Miniature Current Transformers for
Metering/Indication Type Applications.**

DIMENSIONS:

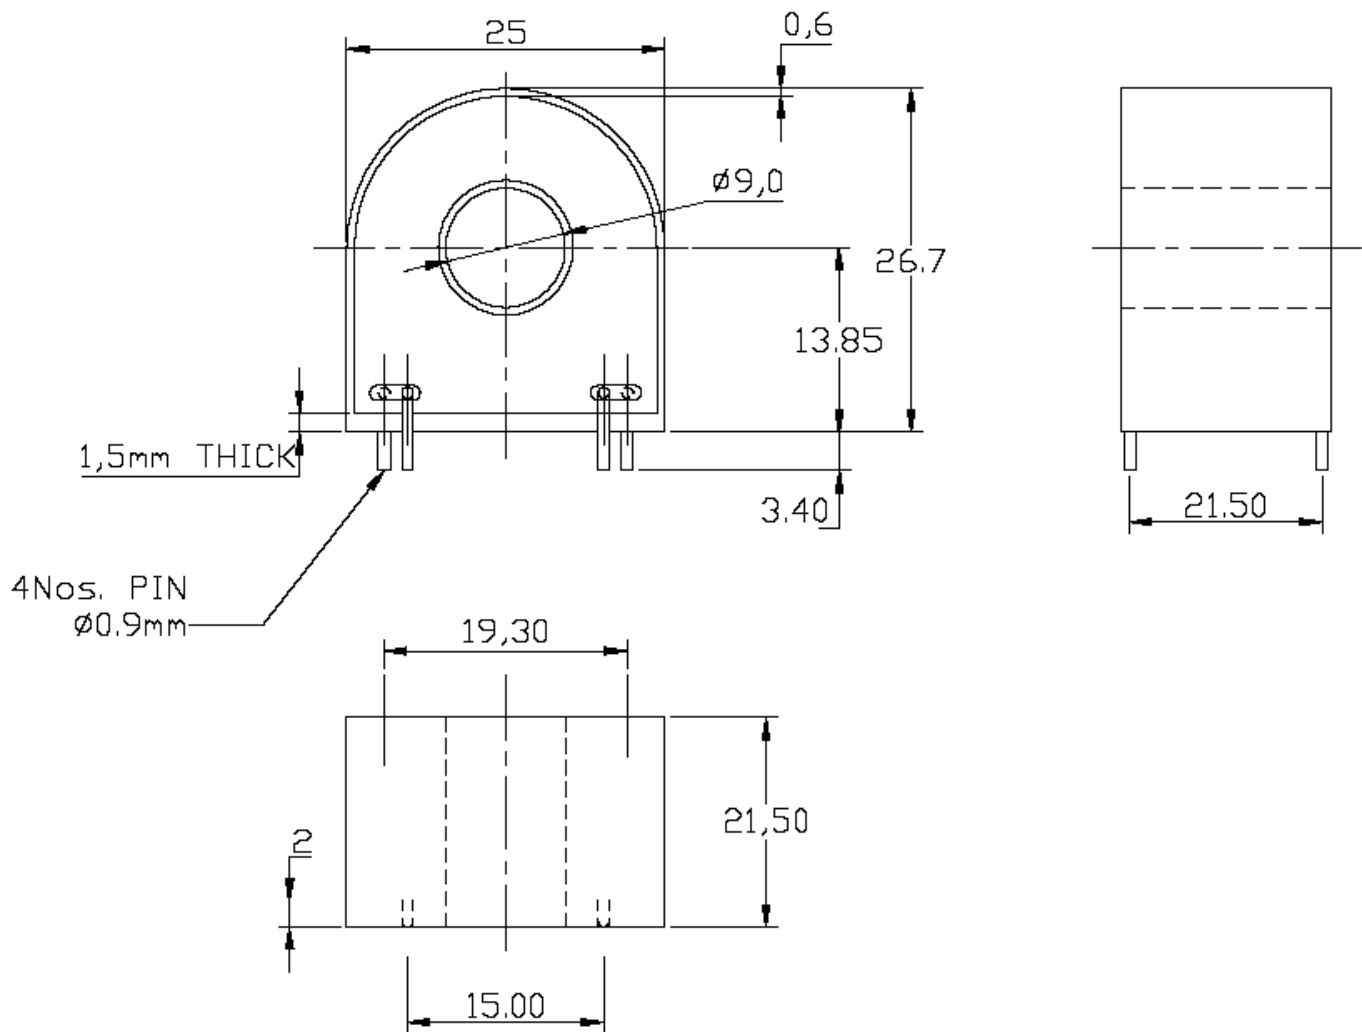

ALL DIMENSIONS ARE IN mm

Accuracy and Linearity: -

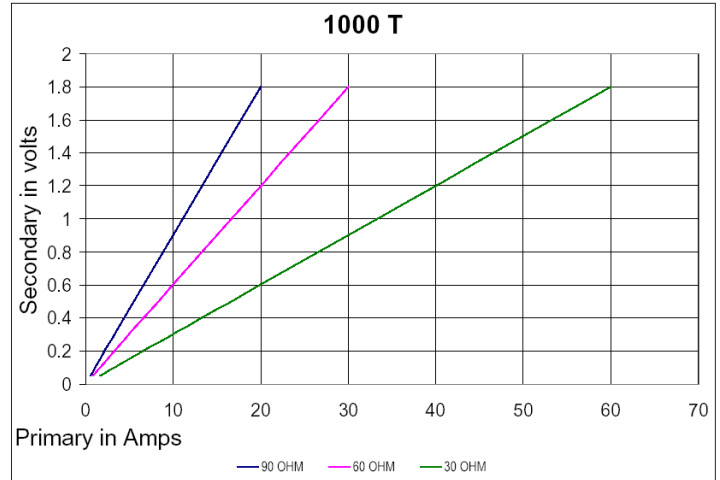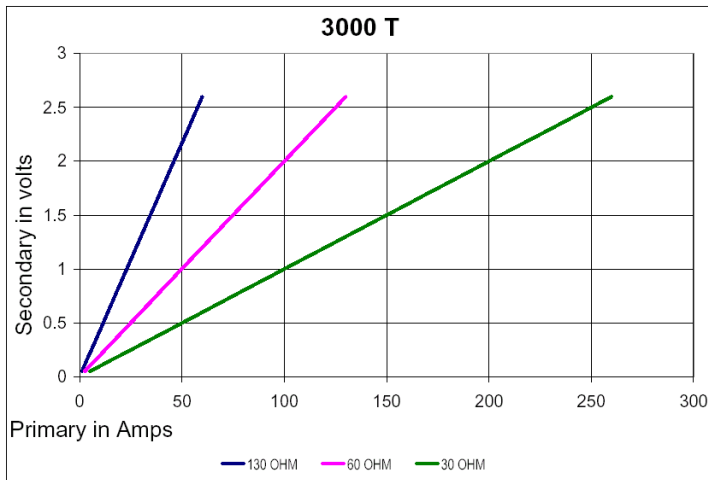

V-I characteristics: -

