

STANDARD UNIT



INSULATION LEVEL

660 V/3kV

FREQUENCY

50-400 Hz.

ACCURACY

0.1% to 0.5%

OUTER ENCAPSULATION

Engineering plastic cased

SECONDARY TERMINALS

PCB mounting pins

OPTIONAL PRIMARY LEADS



**OPTIONAL 3 IN 1 DESIGN WITH
PRIMARY LEADS**




CUSTOM OPTIONS (CONTACT US)

- Custom Ratios possible
- mV output possible
- Primary 5 Amps to 300 Amps or more
- Primary turns of 4 to 30 based on ratio and accuracy
- Optional Secondary Leads PCB Mounting ANS
- Optional Primary Winding With Lugs Or Terminals
- Optional 3 in 1 Design
- **RoHS compliant range**





- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard

DIMENSIONS:

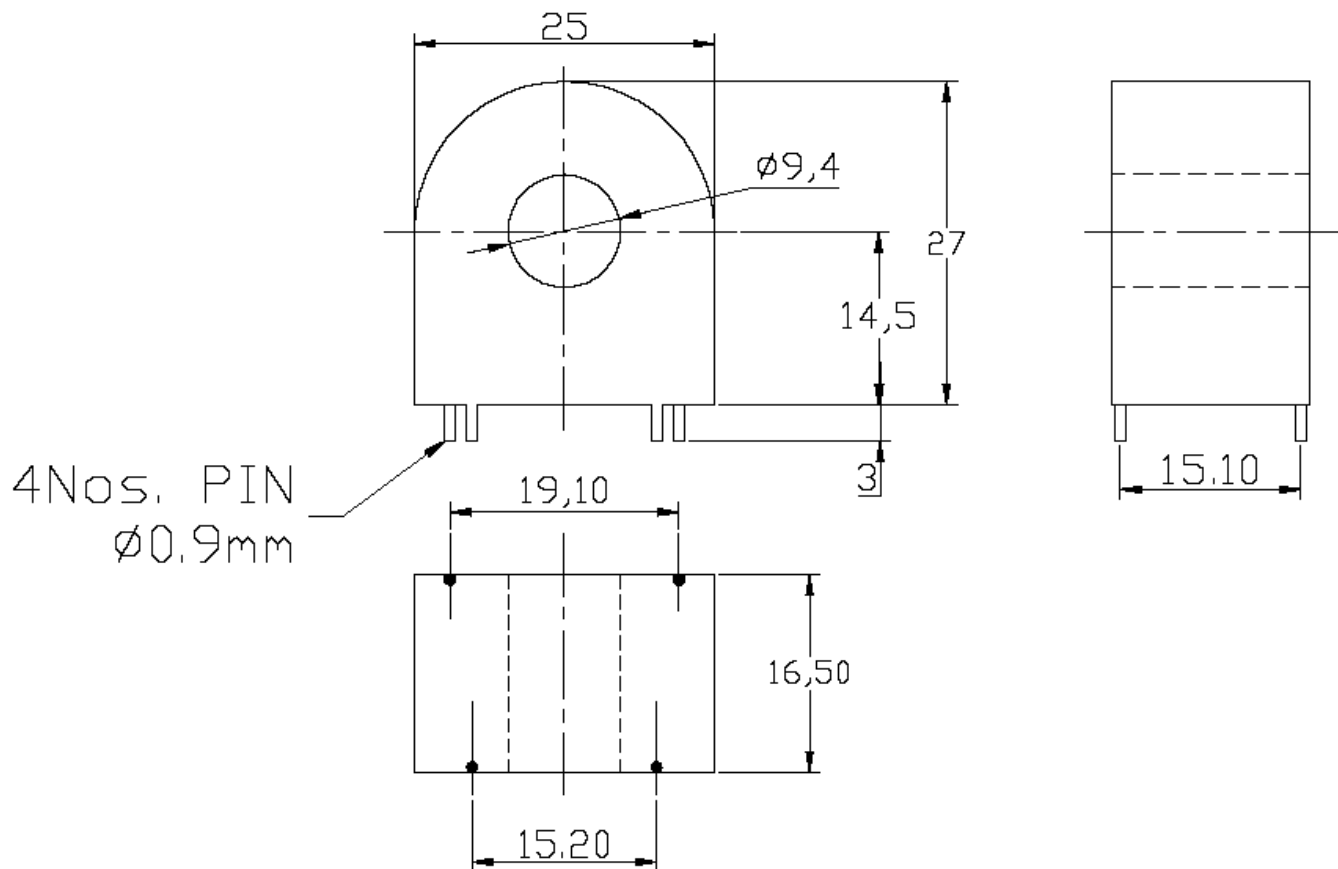

ALL DIMENSIONS IN mm

Accuracy and Linearity: -

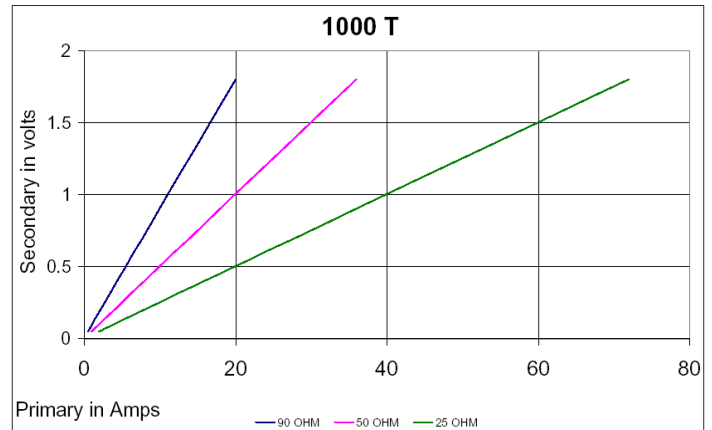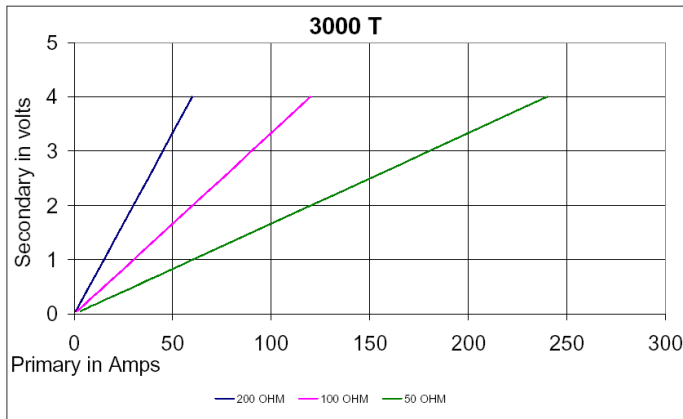

V-I characteristics: -

