



INSULATION LEVEL

600 V; BIL 10kV full wave

FREQUENCY

60 Hz.

ACCURACY CLASS

0.6W, 1.2X @ 60 Hz

THERMAL RATINGS

150VA @ 30 deg. C ambient

100VA @ 55 deg. C ambient

OUTER ENCAPSULATION

Thermoplastic Shell

TERMINALS


Brass studs No 10-32 UNC with one flat washer, lockwasher and regular nut.

APPROX. WEIGHT

7.75 lbs.

CUSTOM OPTIONS (CONTACT US)

- Different Ratios
- Different encapsulation (epoxy resin,tape etc.)
- Different secondary termination
- Special electrical/mechanical/mounting needs possible
- Customer specific secondary voltages possible

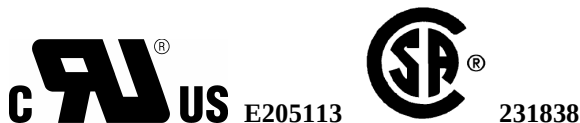


- UL, cUL Recognized and CSA Certified
- As per ANSI/IEEE C57.13 OR IEC 60044 OR relevant standard

TABLE:

CATALOG NUMBER	VOLTAGE RATING	TURNS RATIO	RECOMMENDED SECONDARY FUSE RATING
PT100-069	69.3:120	0.58:1	1.6 Amp
PT100-120	120:120	1:1	1.6 Amp
PT100-208	208:120	1.73:1	1.6 Amp
PT100-240	240:120	2:1	1.6 Amp
PT100-277	277:120	2.31:1	1.6 Amp
PT100-288	288:120	2.4:1	1.6 Amp
PT100-300	300:120	2.5:1	1.6 Amp
PT100-346	346:120	2.88:1	1.6 Amp
PT100-480	480:120	4:1	1.6 Amp
PT100-600	600:120	5:1	1.6 Amp

DIMENSIONS:

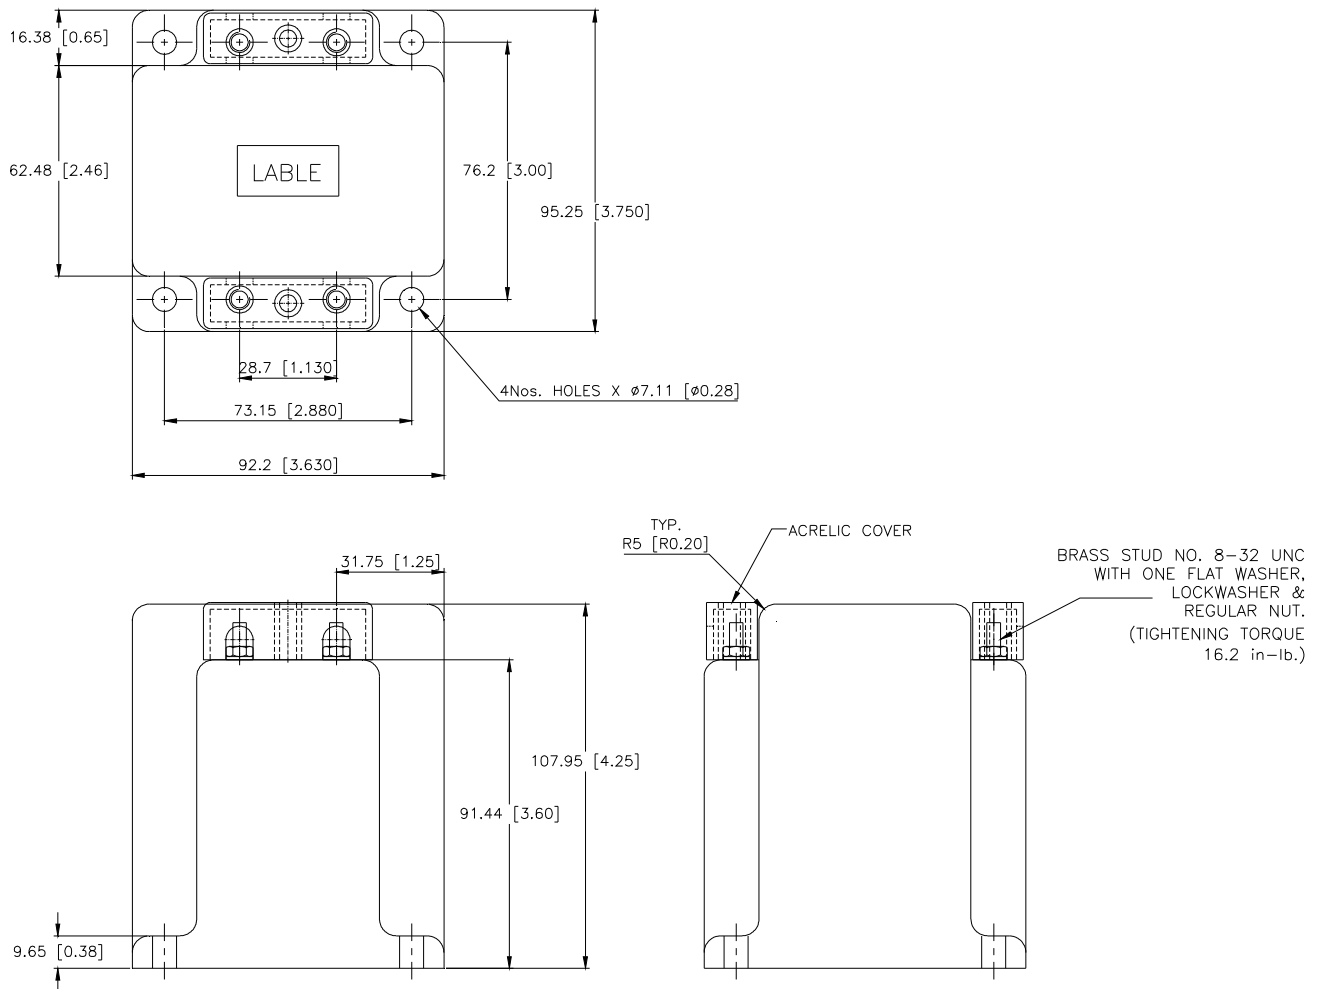

All dimensions are in mm [inches]