

Kelman DGA 900

Next generation on-line multi-gas DGA

Dissolved Gas Analysis (DGA) and moisture measurement of insulating fluids are recognized as the most important tests for condition assessment of transformers. In previous years, multi-gas DGA was traditionally confined to a laboratory environment, with infrequent off-line manual sampling forming part of time-based maintenance strategies. However, as the global average age of transformers continued to rise, the possibility of rapid ageing, unplanned outages and even catastrophic failure between off-line tests also increased, leading many asset owners to adopt on-line DGA monitoring strategies to increase network reliability.

In the early 2000's, GE's Kelman™ range of analysers brought consumable-free on-line multi-gas DGA to the market and GE is now proud to introduce the Kelman DGA 900, our next generation multi-gas on-line DGA and moisture analyser. At its heart lies an evolved implementation of GE's proven Photo-Acoustic Spectroscopy (PAS) measurement technology, providing laboratory challenging levels of precision and repeatability with no consumables and no need for frequent re-calibration. Benefiting from over 40 years of global DGA vendor experience, the Kelman DGA 900 encapsulates learnings and improvements derived from its predecessors to bring improved performance, innovative new features, enhanced user experience and increased robustness.

Key Benefits

- Provides remote alert and multi-gas diagnostic of deteriorating transformer condition
- Expedites operational decisions without needing to go to site for manual oil sampling
- Issues can be detected in their infancy, avoiding unexpected failures and facilitating planned outages
- Anchors condition based maintenance and asset replacement strategies on hard data
- No need for consumables or frequent recalibration to operate at optimum performance
- New "Rapid Mode" provides near real time insight on fast developing faults
- Enhanced computing power and scalable I/Os for a flexible transformer monitoring solution
- Compatible with mineral insulating oils and newer ester based fluids (natural and synthetic)

Applications

The Kelman DGA 900 is an invaluable foundational tool for implementing Asset Performance Management (APM) across electrical generation, transmission and industry, enabling a condition based asset replacement strategy and delivering improvements in system reliability and availability.

A DS-Agile™ and PREDIX™ Grid APM ready device, the DGA 900's wide range of communication methods and protocols enables connection to those platforms and integration with GE's Perception™ transformer fleet management software as well as other software, historian and SCADA systems.



Proven Technology

- 4th generation of GE's PAS technology delivering improved accuracy with lower detection limits
- From the only vendor with 15 years PAS experience and installed base of >13,000 units
- No carrier or calibration gas consumables
- Laboratory challenging field measurement of nine gases plus moisture
- Complete DGA analysis up to once per hour and new "Rapid Mode" for critical gases in ~30 min

Reliable and Available

- First Kelman device designed by GE leveraging our quality and continuous improvement ethos
- Enhanced reliability and easier field servicing
- 5-year warranty as standard †
- Factory calibration benchmarked against industry standard laboratory assessment

Intuitive and Flexible

- Integrated 7" colour LCD screen for simplified local user interaction and visualisation of data
- Lightweight innovative two-enclosure design enables adjacent or separated installation
- Can connect to AC or sub-station DC power

Scalable and Connected

- Expandable analogue/digital I/Os
- Future proof computing platform ready for feature enhancements
- Designed for cyber security, with a range of comms options and protocols



Technical Specifications


MEASUREMENTS	
Technology	Frequency
Automated headspace gas extraction	Configurable from once per hour to once every 4 weeks
Photo-acoustic spectroscopy (PAS) gas measurement	Faster sampling automatically triggered upon alert level reached
Thin film capacitive moisture sensor	
Immersed Fiber Optic Oxygen sensor	"Rapid Mode" provides a rapid indication of the evolution of the gasses indicated below in ~30 minutes

Range	LDL	UDL	Accuracy*	Repeatability	Available in Rapid Mode
Hydrogen (H ₂)	5 -	5,000 ppm	± LDL or ±5%	< 3%	●
Carb. Monox. (CO)	1 -	50,000 ppm	± LDL or ±3%	< 2%	●
Methane (CH ₄)	2 -	50,000 ppm	± LDL or ±3%	< 2%	●
Acetylene (C ₂ H ₂)	0.5 -	50,000 ppm	± LDL or ±3%	< 2%	●
Ethylene (C ₂ H ₄)	1 -	50,000 ppm	± LDL or ±3%	< 2%	●
Carb. Diox. (CO ₂)	20 -	50,000 ppm	± LDL or ±3%	< 3%	●
Ethane (C ₂ H ₆)	1 -	50,000 ppm	± LDL or ±3%	< 2%	●
Oxygen (O ₂)	100 -	50,000 ppm	± LDL or ±5%	< 2%	●
Nitrogen (N ₂) **	10,000 -	100,000 ppm	± LDL or ±15%		
Moisture (H ₂ O)	0 -	100% RS (in ppm)	± 3% RH	< 3%	●

*whichever is greater. Accuracy quoted is the accuracy of the detectors during calibration. Gas-in-oil measurement may be affected by oil type and condition. Repeatability as measured from final production test data.
 ** N₂ value is calculated and available on free-breathing transformers only.



DGA 900 being tested in the factory

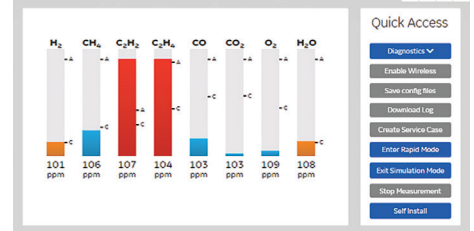

DGA 900 gas levels displayed on the local LCD screen

FEATURES	
Display	4x sunlight visible LED arrays Backlit 7" inch color resistive touch LCD screen (800 x 480) Integrated embedded secure webserver (https)
Analogue Inputs	Up to 15x optional analogue inputs for load CTs, PT100 inputs or 4-20mA sensors
Digital Output	USB port (type B connector) for local connection to laptop computer for configuring the system Wi-Fi (802.11b/g/n) Serial output (RS-485) 1Gb Ethernet (RJ45) standard with fiber-optic options GSM/GPRS or CDMA/LTE modem options
Digital Protocols	Modbus® as standard DNP3 or IEC 61850 (Ed 1 or 2) options

Alarms	
Alarm setting screens/scenarios, based on gas level, gas rate of change and moisture level, assignable to relays	6x standard and up to 18x dry contact relays (type C, SPDT), NO/NC, 10A at 250Vac resistive load, 10A at 30Vdc resistive load
Separate Service Alarm with own relay	
ENVIRONMENT	
Conditions	-40°C to +55°C (-40°F to +131°F)
Operating ambient temperature	0-95% RH, non-condensing
Operating ambient humidity	-20°C to +120°C (-4°F to +248°F)
Oil temperature at valve***	0-700KPa (0-100psi)
Oil pressure at valve	
***Based on testing carried out using VOLTESSO™ 35 mineral oil, over a ¼" pipe run of 10 metres or less from oil supply or return valve to monitor connection point and on transformer oil supply valve volumes of 200ml or less. For oil temperatures colder than -20°C GE recommends the use of heat trace cabling on piping	

Enclosure	
IP56 certified	Powder coated aluminium (RAL9002) Unpainted 316 Stainless Steel option
Power Requirements	
AC	Nominal 100-240 Vac, Range 85-264 Vac, 4A
DC	Nominal 100-250 Vdc, Range 90-300 Vdc
Mechanical	
	Analysis Unit Hub Unit
Dimensions	600 x 484 x 330 mm 600 x 380 x 330 mm
	23.6 x 19.1 x 13.0 in 23.6 x 15.0 x 13.0 in
Weight	33.4Kg 18.5Kg
	73.6 lb 40.8 lb
OPTIONS	
Mounting stand	Sun canopy
Umbilical cable between units	Analogue output of gas values
† Terms and conditions apply	

Kelman DGA900	E0	P0	M0	U0	S0	C0	CO	X0	X0	X0	X0	X0	Base Unit	9 Gas DGA, Powder coated enclosure, 2m umbilical, Modbus TCP over Ethernet, Load CT, install kit, and Perception desktop.
Protocol Options	P1	P2	P3	P4									COMM90022	DNP3 over RS485
													COMM90012	DNP3 over Ethernet
													COMM90013	IEC 61850 Edition 1 over Ethernet
													COMM90014	IEC 61850 Edition 2 over Ethernet
Mounting Stand			M1										24-0822-01	Mounting Stand
Umbilical Cable				U1									CABL01054	5 Meter
				U2									CABL01055	10 Meter
Sun Canopy					S1								24-0973-01	Sun Canopy
Communication Options						C1							COMM90016	Ethernet Converter - RJ45 to 10/100Mbps Multimode Fibre ST Connector
						C2							COMM90017	Ethernet Converter - RJ45 to 10/100Mbps Multimode Fibre SC Connector
						C3							COMM90018	Ethernet Converter - RJ45 to 10/100Mbps Multimode Fibre LC Connector
						C4							COMM90019	Ethernet switch, 2 x 100BaseF - ST Multimode Fiber (2 Km max) + 4 x RJ45 10/100Mbps copper
						C5							COMM90020	Ethernet switch, 2 x 100BaseF - SC Multimode Fiber (2 Km max) + 4 x RJ45 10/100Mbps copper
						C6							COMM90021	Ethernet switch, 2 x 100BaseF - SC Singlemode Fiber (20 km max) + 4 x RJ45 10/100Mbps copper
							C7						COMM90005	GSM / GPRS Modem
							C10						COMM90015	Wireless Cell Modem for USA - internal
Analogue I/O Card (5 slots available)								X1	X1	X1	X1	X1	13-0263-01	Analogue Input Card, 4-20mA
								X2	X2	X2	X2	X2	13-0256-02	Analogue Input Card, for PT100 Temp Sensor (4 wire)
								X3	X3	X3	X3	X3	13-0256-02-OPT1	Analogue Input Card, for PT100 Temp Sensor (3 wire)

Additional modules and configurations available. Please contact your sales representative or visit our online store

Grid Solutions
 Lissie Industrial Estate East
 Unit 1, 7 Lissie Walk
 Lisburn BT28 2LU
 United Kingdom
 Tel: +44 (0) 2892 622915

GEGridSolutions.com

Modbus is a registered trademark of Schneider Automation Inc., IEC is a registered trademark of Commission Electrotechnique Internationale. Voltesso is a registered trademark of Exxon Mobil Corporation. GE, the GE monogram, Kelman, DS-Agile, PREDIX and Perception are trademarks of the General Electric Company.

GE reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

Copyright 2017, General Electric Company.

Grid-GA-L3-DGA_900-1599-2017_05-EN

